

Dunkirk

97gb

High Efficiency Gas-Fired Modulating Condensing Boiler Convertible (Floor or Wall)

- 95% AFUE
- Floor or Wall Mount
for Flexible Installation
- Built in Primary/Secondary Piping
with Pump Reduces Installation Time
- Built-In Low Water Cut Off
- Warranty Coverage
 - 15 year Limited Manufacturer's
 - FREE 2 Year Parts
& Labor Warranty*



*Unit must be registered within 60 days from the date of original installation,
All terms of Trinity Extended Service Agreement apply.

Dunkirk

Innovative. Efficient. Dependable. Dunkirk.



www.dunkirk.com

Residential Gas Modulating Condensing Hot Water Boiler

Winter is notorious for all sorts of life's little gems. With the ever present threat of colds and flu, school closings and delays, and an unpredictable daily commute - a runaway heating bill is the last thing you need. The truth is, most homeowners focus solely on utility costs and don't actually think about their heating system until it needs to be repaired or replaced. One "No Heat" call to your local contractor can cost \$300 or more, just to diagnose a problem and if your boiler has out-lived its warranty, you'll be responsible for the full cost of parts and labor.



Your old low efficiency heating system can have an annual fuel utilization efficiency (AFUE) of 70%. That means 70% of the energy in the fuel becomes heat for the home and the other 30% escapes up the chimney and elsewhere. With an old inefficient boiler you could be throwing away up to 30% of the money you spend on fuel each year.



Doesn't your family deserve a new high efficiency home heating system and all the comfort and peace of mind that come with it?

The 97gb features 95% AFUE.
Just add up the savings:

- 95% AFUE
- Sealed Combustion
- *Built-in Outdoor Temperature Reset


(*A factory standard Outdoor Temperature Reset adjusts water supply temperature for best possible fuel economy based on actual seasonal conditions.)

The increased efficiency of the 97gb could save you over 40% on your heating bill each year.
If you pay \$1,800 annually to heat your home, you could save as much as \$720 per year.

That's \$3,600 over 5 years![†]

[†] (Individual savings may vary).

If you have kids or pets that play in the basement or utility room, the 97gb offers optional wall mount installation, freeing up valuable floor space and easing ground level safety concerns. Since most of us have better things to do than fumble with the thermostat, the 97gb has an advanced microprocessor control that continuously monitors supply and return water temperature, automatically adjusting the boiler's output to keep the whole family comfortable. Another plus, when used with an indirect hot water heater, the 97gb quickly and efficiently redirects heat when and where it's needed. No standing around, waiting for hot water.



Need more...how about:

- A 15 Year Limited Manufacturer's Warranty
- Ideal for new construction radiant heat applications.

For more information contact your local utility provider or visit:
<http://www.dsireusa.org/incentives/>

97gb – Replacement/New Construction Ready Right Out of the Box

95% Efficient, 100% Easy to Install


1) Control Interface
(Optional Wall Mount)



2) Probe Type Low Water Cut-Off




Easy Floor or Wall Mount Application (Hanging Bracket and 4 Lag Bolts included)

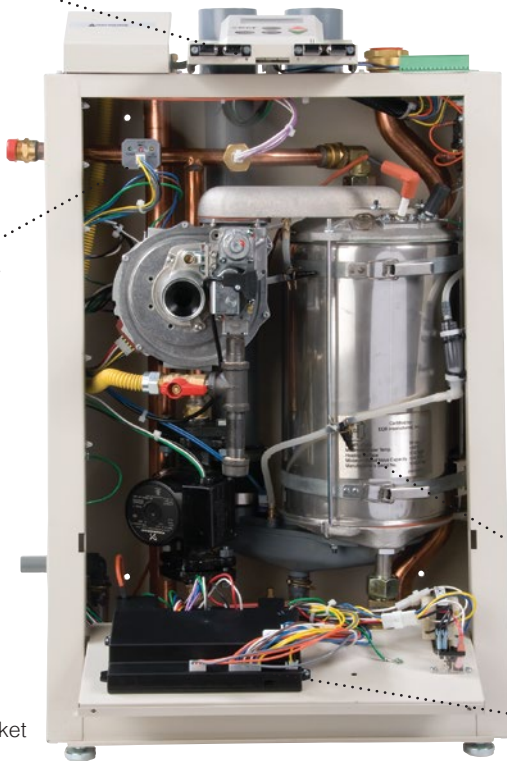

- Floor or wall mount for greater installation flexibility.
- Built in primary/secondary piping with pump takes hours of labor out of your installation. Special high head system pumps not required for most applications.

- Convenient valve for primary/secondary loop requirements in multiple boiler applications.

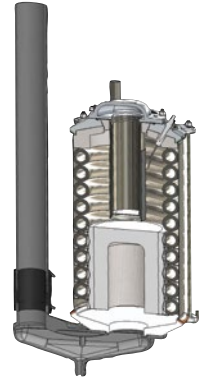

3) Heat Exchanger



Control panel hinges down for installation and service and can be completely removed if needed.

1. The Control Interface features easy-to-understand text display, remote mount option and simple 2 wire connection. When the cover is on the unit, the control interface is protected by a smoke plastic hinged cover. A cover insert is standard for use with the remote mount option.

2. Built-In Probe Type Low Water Cut-Off features test button.

3. Revolutionary Exclusive Heat Exchanger

- Constructed of 316L/444 Stainless Steel fin tube
- Self-Cleaning
(Internal waterways are wide and smooth which inhibits scaling while water flow helps remove hard water deposits)
- Easy access for servicing



- 100% Compatible with Existing Piping
 - Flexible Piping (Top & Bottom)
 - Gas line connection can run out the top or be changed in the field to the bottom. Top and bottom supply/return options have 1-1/4" tapings. Boiler shipped with brass plugs for installer use.
- Venting
 - Vent transition is constructed of PVC which is impervious to acidic condensate that pools and is corrosive to metals.













Leveling legs for floor mount applications included.



- Simplified Electrical Connections (120V, Argus™ Control, Low Voltage Terminal Strip)

97gb Natural or Propane Modulating Gas-Fired Condensing Boiler

Dimensions/Weights	Model	Boiler Input Rate (MBH) ⁽¹⁾		Heating Capacity (MBH) ⁽¹⁾⁽²⁾	Net AHRI Rating, Water (MBH) ⁽¹⁾	AFUE % ⁽²⁾										
		Max.	Min.													
 <p style="text-align: center;">Front</p>	ECR075	75	15	69	60	95.0										
	ECR100	100	20	91	79	95.0										
	<p>(1) 1000 Btu/hr (British Thermal Units Per Hour)</p> <p>(2) Heating Capacity and AFUE (Annual Fuel Utilization Efficiency) are based on DOE (Department of Energy) test procedures.</p> <p>(3) Net AHRI Ratings based on piping and pickup allowance of 1.15. Contact ECR Technical Support before selecting boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.</p>															
	<p>General Information (See Installation, Operation and Maintenance Manual for complete instructions)</p>															
	<p>Flooring May be installed on Combustible flooring (No Carpets)</p>															
 <p style="text-align: center;">Top</p>	Clearances			Combustible Materials (Required)	Service*											
		Top		0" (0 cm)		14" (36 cm)										
		Left Side		6" (16 cm)		6" (16 cm)										
		Right Side		0" (0 cm)		1 1/2" (4 cm)										
		Front		0" (0 cm)		6" (16 cm)										
		Back		0" (0 cm)		0" (0 cm)										
		Bottom		0" (0 cm)		0" (0 cm) Floor Mount 12" (32 cm) Bottom Piped										
		Combustion Air/Vent Piping		0" (0 cm)		6" (16 cm)										
		Hot Water Piping		See Local Code		6" (16 cm)										
		All distances measured from the boiler. *Service, proper operation clearance recommendation.														
 <p style="text-align: center;">Bottom</p>	Combustion Air & Vent Pipe Equivalent Length (Schedule 40 PVC)			2" Pipe Equivalent Ft. (m)	3" Pipe Equivalent Ft. (m)											
		Min. Length		6 Ft. (1.8 m)		6 Ft. (1.8 m)										
		Max. Length		50 Ft. (11.2 m)		100 Ft. (30.5 m)										
<p>Notes: 1 - 90° Elbow = 5 Ft. (1.6 m), 1 - 45° Elbow = 3.5 Ft. (1.1 m), 1 - 2" x 4" Adapter = 0 Ft. (0 m), Concentric Vent Kit = 5 Ft. (1.6 m) equivalent length.</p>																
 <p style="text-align: center;">Back</p>	Connections		Return/Supply Water: 1-1/4" NPT	Gas In: 1/2" NPT	Condensate Drain: 1/2" PVC											
	Electrical 120 Volts AC, 60 hertz, 1 phase, Less than 12 amps (15 amp circuit recommended)															
	Water Content 1.1 Gallons															
<p>Standard Equipment</p> <p>Mounting Floor/Wall: Leveling Legs and Wall Bracket both included. Boiler Control Module: Automatic Low Voltage/Intermittent Power Reset. Controls up to 16 boilers for multiple boiler applications. User Display interface: Easy programming with text display. Remote mount option utilizes standard thermostat conductor wiring. Heat Exchanger: High grade 316L/444 Stainless Steel Fin Coil with Flame Sight Glass. Built-in Primary/Secondary Manifold Piping and Pump. Combustion: Gas Valve with Premix Venturi and Blower, Durable Stainless Steel Mesh Burner, Direct Spark Igniter, Flame Sensor and LP Conversion Kit included. Electrical: Detachable Low Voltage Terminal Strip, High Voltage Junction Box, Transformer, Lighted Power Switch and Auxiliary Service Power Outlet. Other: Low Water Cut Off with test feature, Outdoor Temperature Reset, 30 PSI Safety Relief Valve, Boiler Drain Valve and Condensate Drain with built in trap.</p>																
<p>Options Central Heating Pump (Taco 007 or Grundfos UP15-42F)</p>																
<p>Accessories Concentric Vent Kit (2" and 3"), System Sensor (For Multiple Boiler Applications), Computer Interface</p>																
<p>Dimensions</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">Models</td> <td style="text-align: center;">075/100</td> </tr> <tr> <td style="text-align: center;">Width (A)</td> <td style="text-align: center;">22-1/16" 560 mm</td> </tr> <tr> <td style="text-align: center;">Height (B)</td> <td style="text-align: center;">35-5/8" 905 mm</td> </tr> <tr> <td style="text-align: center;">Depth (C)</td> <td style="text-align: center;">16-3/16" 411 mm</td> </tr> <tr> <td style="text-align: center;">Bracket (D)</td> <td style="text-align: center;">27-1/2" 969 mm</td> </tr> </table>		Models	075/100	Width (A)	22-1/16" 560 mm	Height (B)	35-5/8" 905 mm	Depth (C)	16-3/16" 411 mm	Bracket (D)	27-1/2" 969 mm	<p>Certifications</p>      				
Models	075/100															
Width (A)	22-1/16" 560 mm															
Height (B)	35-5/8" 905 mm															
Depth (C)	16-3/16" 411 mm															
Bracket (D)	27-1/2" 969 mm															
<p>Weights</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">Ship Wgt.</td> <td style="text-align: center;">140 lbs. 63.5 kg</td> </tr> <tr> <td style="text-align: center;">Boiler Wgt.</td> <td style="text-align: center;">115 lbs. 51.2 kg</td> </tr> </table>		Ship Wgt.	140 lbs. 63.5 kg	Boiler Wgt.	115 lbs. 51.2 kg											
Ship Wgt.	140 lbs. 63.5 kg															
Boiler Wgt.	115 lbs. 51.2 kg															

All ratings and specifications subject to change.

PN 240011650 Rev. 2/17-USA Only



P.O. Box 4729
Utica, New York 13504

Tel: 315.797.1310
Fax: 315.797.3762

Contractor Assistance:
800.325.5479

