



America's Hottest Boiler Value!
AN ISO 9001 CERTIFIED COMPANY

HYDRONIC AIR HANDLERS

HWFC Series

The HWFC Series of hydronic air handlers are designed to be installed in any residential or light commercial warm air application. The HWFC is an integral component of a complete heating system that utilizes an oil or gas-fired hot water boiler as its primary heating source and a dedicated duct system.

All HWFC models are designed to accept add-on air conditioning equipment to provide centralized comfort conditioning in all seasons.

Available in three sizes, the HWFC offers a full range of heating and cooling capacities-up to 147,250 BTU/h heating and cooling from 3 to 5 tons (36,000-60,000 BTU/h).

▶ APPLICATIONS

The HWFC offers the economy and comfort advantages of a hydronic heating source. Ideal as retrofits or replacements for less efficient electric or heat pump systems. Installation of a boiler and an HWFC hydronic fan coil unit offers the homeowner maximum flexibility, economy and comfort.

This equipment offers an excellent solution for the delivery of heating to multiple floors when a hot water radiant system is utilized on the first floor. The addition of the air conditioning coil and condenser offers cooling through the duct system. Add an indirect domestic water heater and gain additional economies and comfort from the integrated hydronic heating system.

▶ EASY INSTALLATION & MAINTENANCE

The HWFC low cabinet design can be installed upflow or horizontal either side, providing installation flexibility in retrofits, replacements, or new construction.

The HWFC is equipped with an external filter rack whose location is determined by the installation requirements.

▶ WARRANTY

One year parts, 5 year coil warranty is standard.




OPTIONAL A-COIL
CONFIGURATION



- ▶ Compatible with all properly sized boilers
- ▶ Available in 3 cabinet sizes, in capacities ranging from 38,500 to 147,250 BTU/h
- ▶ Can be installed upflow or horizontal
- ▶ Copper Tube aluminum fin heating coil
- ▶ Full size hydronic coil for efficient heat transfer
- ▶ Factory supplied, field installed, external filter rack
- ▶ Direct drive blower
- ▶ Left, right or bottom air return
- ▶ Integral door safety switch
- ▶ On call for heat, blower activated by water temperature sensor
- ▶ Post purge adjustable fan timer
- ▶ Controls provided to accept A/C as standard

HYDRONIC AIR HANDLERS **HWFC Series**

PERFORMANCE & SPECIFICATION DATA

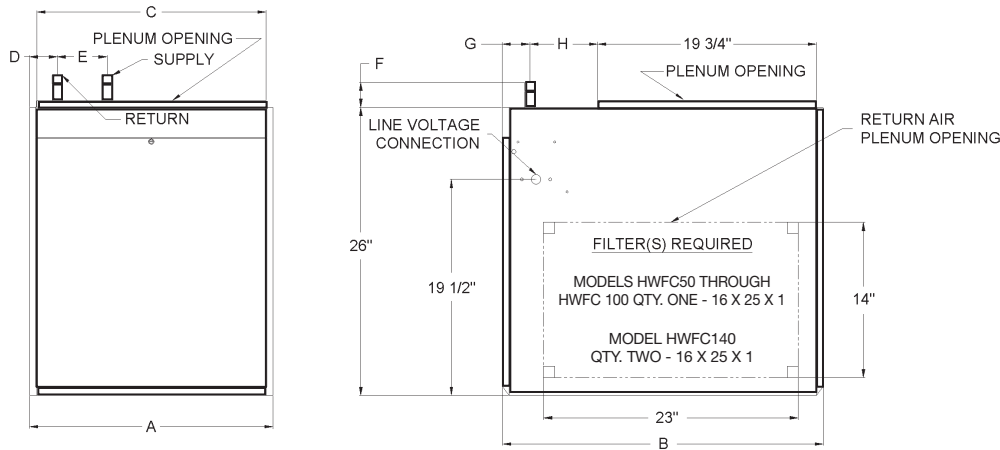

DIMENSIONAL & WEIGHT DATA

UNIT MODEL	A	B	C	D	E	F	G	H	SUPPLY & RETURN	WEIGHT (LBS.)
HWFC 05	17 1/2"	27"	16 1/4"	2 1/4"	3 1/2"	2 1/4"	4"	3"	1/2"	80
HWFC 10	22"	29"	20 3/4"	2 1/2"	4 1/2"	2 1/4"	1 1/2"	7 1/4"	3/4"	95
HWFC 15	26 1/2"	29"	25 1/4"	2 3/4"	4 1/2"	2"	1 1/2"	7 1/4"	1"	110

BLOWER DATA

UNIT MODEL	MOTOR HP	BLOWER SIZE	MAXIMUM MOTOR AMPS (120V)	FAN SPEED (120V)*	CFM vs. EXTERNAL STATIC PRESSURE			
					.2	.3	.4	.5
HWFC 05	1/3	10-7	5.2	HIGH	1350	1300	1250	1200
				MEDIUM	910	910	900	875
				LOW	750	745	740	720
HWFC 10	3/4	10-9	9.1	HIGH	1910	1850	1700	1620
				MEDIUM	1660	1650	1540	1465
				LOW	1400	1380	1330	1260
HWFC 15	3/4	10-10	9.1	HIGH	2300	2220	2100	2000
				MEDIUM	1920	1880	1830	1765

PERFORMANCE DATA

UNIT MODEL	MAX TONS HIGH SPEED A/C	G.P.M. COIL	COIL PRESSURE DROP (FtWg)	OPTIONAL BLOWER SPEED*	HEATING BTU/h AT °F WATER @ .2 STATIC PRESSURE			
					140°F	160°F	180°F	190°F
HWFC 05	3	6.0	6.4(FtWg)	LOW**	36,600	46,600	55,700	61,550
		4.4	3.6	MEDIUM	45,000	55,500	67,000	72,300
		AIR CONDITIONING ONLY*						
HWFC 10	4	8.7	6.0	LOW**	65,200	81,900	98,600	103,100
		6.0	3.0	MEDIUM	71,600	89,500	107,400	114,550
		AIR CONDITIONING ONLY*						
HWFC 15	5	12.2	5.0	MEDIUM**	88,300	114,400	139,000	141,200
		8.7	2.7	HIGH	96,700	125,400	147,250	157,250

* High speed for AC only - Do not wire high speed for heating side of system. ** Factory set motor speed. Unit performance based on 70 degrees F entering air temperature. Circulator pump purchased separately. Boiler must be sized to have a minimum capacity equal to HWFC output and other system loads.

Due to ongoing product development, specifications are subject to change without notice.



AN ISO 9001 CERTIFIED COMPANY

85 Middle Road • Dunkirk, New York 14048
Web Site: <http://www.dunkirk.com> • E-mail: heating@dunkirk.com

PHONE: 716-366-5500 • FAX: 716-366-1209



HWFC 1/02 Rev